

WHELEN[®]

ENGINEERING COMPANY



MODEL VPPS4C REMOTE STROBE POWER SUPPLY

ROUTE 145, WINTHROP ROAD
 CHESTER, CONNECTICUT 06412-0684
 TELEPHONE: (860) 526-9504
 FAX: (860) 526-4078


WARNING... THE STROBE LIGHT POWER SUPPLY IS A HIGH VOLTAGE DEVICE. DO NOT REMOVE STROBE TUBES OR DISMANTLE STROBE LIGHT HEAD ASSEMBLIES IN SYSTEM WHILE IN OPERATION. WAIT 10 MINUTES AFTER TURNING OFF POWER BEFORE STARTING WORK OR ANY TROUBLE SHOOTING.

IMPORTANT NOTE: STROBE LIGHT POWER SUPPLY IS NOT FIELD SERVICEABLE, RETURN TO MANUFACTURER FOR SERVICING. DO NOT TAMPER WITH UNIT!!!

INSTALL STROBE POWER SUPPLY WITH THE CONNECTIONS LOCATED IN SUCH A WAY THAT THEY ARE EASILY ACCESSIBLE.

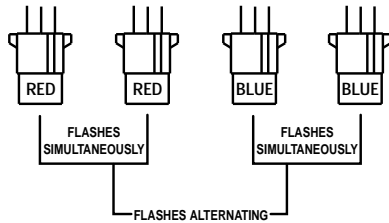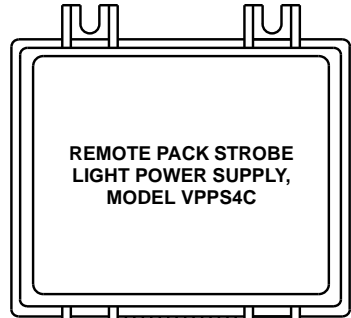

AMP PINS ARE CRIMPED TO 3 CONDUCTOR CABLE FROM THE REMOTE STROBE LIGHT HEAD ASSEMBLY. AFTER ROUTING CABLE INTO POSITION FIT PINS INSIDE PIN CONNECTOR HOUSING.

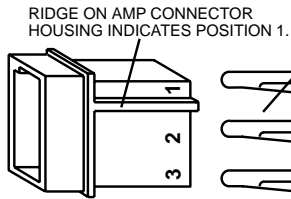

15 FEET OF 3 CONDUCTOR CABLES FROM REMOTE STROBE LIGHT HEAD ASSEMBLIES.


2 ADDITIONAL STROBE LIGHT OUTLETS AVAILABLE ON POWER SUPPLY FOR FUTURE SYSTEM EXPANSION.

IMPORTANT NOTE: WHEN CONNECTING THE AMP PINS CRIMPED ON THE WIRES TO THE AMP PIN HOUSING, OBSERVE SCRUPULOUSLY COLOR POSITION IN HOUSING.

POSITION 1, RED WIRE
POSITION 2, BLACK WIRE
POSITION 3, WHITE WIRE

3 CONDUCTOR POWER CABLE. WHITE WIRE TO BE CUT OFF BY CUSTOMER ON BOTH ENDS OF CABLE.

CABLE ASSEMBLY KIT SUPPLIED WITH THE WHELEN REMOTE PACK STROBE LIGHT SYSTEMS.

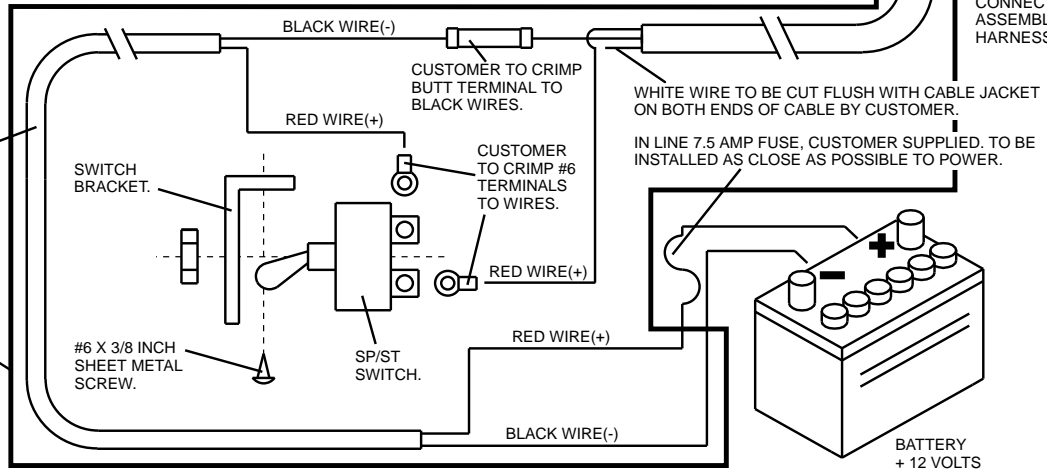

AMP 3 POSITION PIN POWER INPUT.

BLACK WIRE IN POSITION 2 OF CONNECTOR.

RED WIRE IN POSITION 1 OF CONNECTOR.

2 WIRE PIGTAIL WITH AMP 3 POSITION SOCKET CONNECTOR. WIRES OF PIGTAIL ARE TO BE CRIMPED TO INTERCONNECTING 3 CONDUCTOR CABLE.

NOTE: IF INPUT CONNECTOR POLARITY DOES NOT MATCH, BUTT SPLICE NEW CONNECTOR ASSEMBLY TO HARNESS.

BATTERY + 12 VOLTS